




Scope of Application

- Chemistry
- Petro Chemistry
- Water technologies
- Automation application

DN series electromagnetic flowmeters composed of ATEK sensor and converter, work based on Faraday's law of electromagnetic induction. It is used to measure electrical conductivity of liquid or solid. Generally the electrical conductivity should be over 5uS/cm (electrical conductivity of tap water. Raw water is about 100-500uS/cm it can also be used to measure various mediums like acid, alkali, saline, solution, paper, pulp, ore pulp and so on, but these mediums cannot contain a lot of magnetic materials and bubbles.

The principle of the sensor is based on Faraday's law of electromagnetic induction. It is installed a pair of detection electrodes on the pipe wall, where the measurement pipe axis and magnetic field lines are vertical. When the conductive liquid moves along the measurement pipe axis, the conductive liquid cuts magnetic field lines and produces induced electromotive force, which can be measured by the two electrodes on the meter pipe. The result can be calculated by the formula

- E : Induced electromotive force
 K : motor constant
 B : Magnetic flux density
 V : Average velocity of pipe section
 D : Internal diameter of measuring pipe

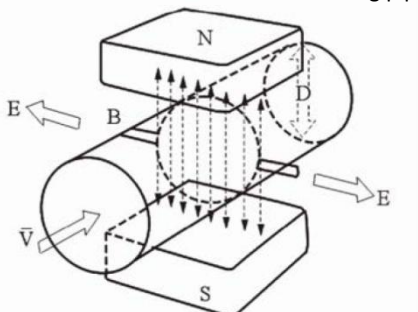


- Working principle based on electromagnetic induction law
- Ability to measure with variable diameter of 15-1200mm
- Long-term perfect work
- Stainless body construction
- Suitable for harsh ambient conditions
- Has analogue or digital signal outputs.

DN SERIES TECHNICAL PROPERTIES



Flange Type	Comply with GB9119 standard, carbon steel (stainless steel optional)
Measure Type	Magnetic
Measuring range velocity	≤20m/s
Pressure level	DN15-DN600 10, 16, 25, 40BAR DN700-DN2400 6, 10, 16BAR
Lining material	PTFE, PU, CR, PFA, F46, IR
conductivity	≥5uS/cm
Elektrode	316L, Hastelloy, Titanium, Tantalum, platinum iridium alloy
Output	Standard (4-20mA), Pulse, RS485, HART, Profibus-PA
Diameter	DN15-DN2400
Input	220VAC or 24VDC
Basic error	±%0,2 or ±%0,5
Repetition	≤±0.1%, ±0.25%
Protection	IP65 or IP67
Operating Temperature	-25°C +80°C refer to the choice of lining material -25°C +180°C
Ambient temp.	-25°C +60°C arası
Body	Comply with GB9119 standard, carbon steel (stainless steel optional)
Elektrical connection	M20×1.5 seal, G1/2, NPT1/2

When measuring flow, fluid flows through magnetic field, which is perpendicular to the direction of the flow. Then the flow of conductive fluid induces electromotive force proportional to the average velocity. Therefore, the detected fluid requires to be higher than the minimum of electrical conductivity. It induced voltage signal is detected through two electrodes and sent to a converter through the cable. After signal processing and related operations. DN electromagnetic flowmeter will display total flow and instantaneous flow in converter display.

Dimension of Converter

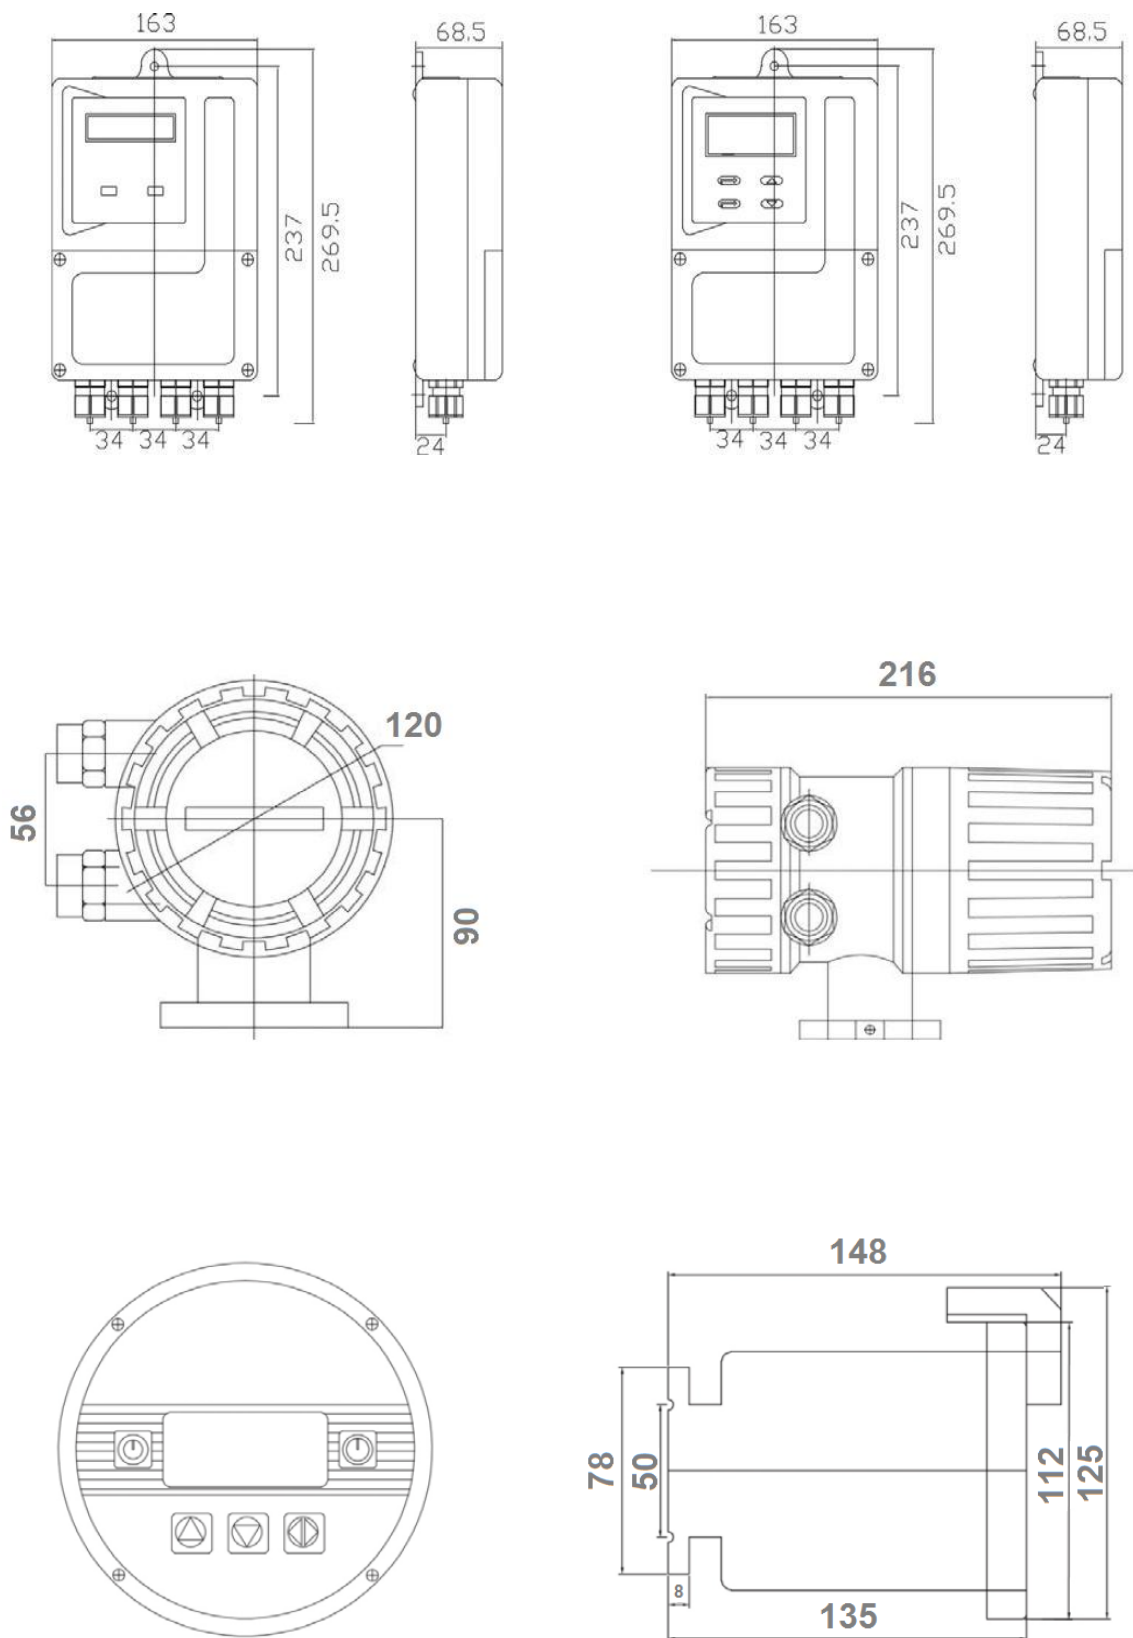

Dimension of Sensor

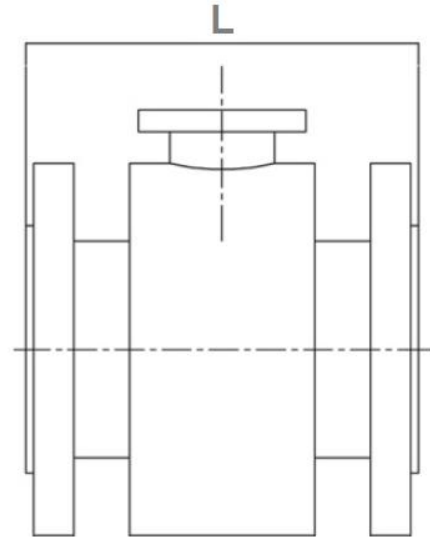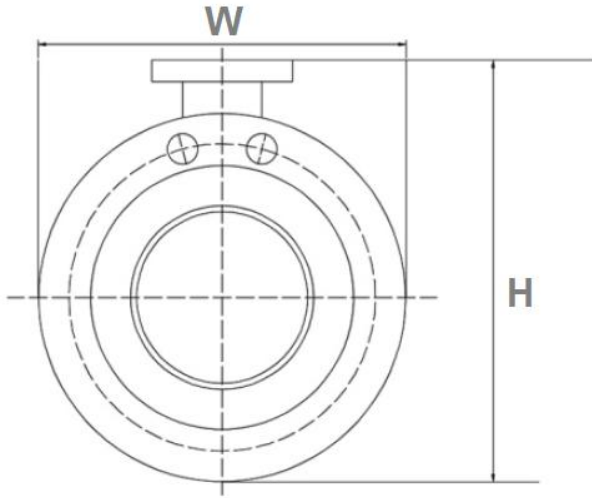

ÖLÇÜLER

Diameter (mm)	Dimension (mm)		
	L	W	H
15	160	95	127
20	160	95	137
25	160	115	147
32	160	115	155
40	195	150	165
50	195	165	187
65	195	185	202
80	195	200	223
100	245	220	249
125	245	250	278
150	295	285	303
200	345	340	358
250	395	395	418
300	500	445	468
350	500	505	560
400	600	640	614
450	600	670	656
500	600	670	710
600	600	780	810
700	700	895	995
800	800	1015	1115
900	900	1115	1215
1000	1000	1230	1350
1200	1200	1405	1505

	Flow rate m ³ /h																	
(DN)	0.4m/s	0.6m/s	0.8m/s	1.0m/s	1.2m/s	1.4m/s	1.6m/s	1.8m/s	2.0m/s	2.2m/s	2.4m/s	2.6m/s	2.8m/s	3.0m/s	4m/s	5m/s	6m/s	7m/s
15	0.25	0.38	0.51	0.64	0.76	0.89	1.02	1.14	1.27	1.40	1.53	1.65	1.78	1.91	2.54	3.18	3.82	4.45
20	0.45	0.68	0.90	1.13	1.36	1.58	1.81	2.03	2.26	2.49	2.71	2.94	3.17	3.39	4.52	5.65	6.78	7.91
25	0.71	1.06	1.41	1.77	2.12	2.47	2.83	3.18	3.53	3.89	4.24	4.59	4.95	5.30	7.07	8.83	10.60	12.36
32	1.16	1.74	2.32	2.89	3.47	4.05	4.63	5.21	5.79	6.37	6.95	7.52	8.10	8.68	11.58	14.47	17.36	20.26
40	1.81	2.71	3.62	4.52	5.43	6.33	7.23	8.14	9.04	9.95	10.85	11.76	12.66	13.56	18.09	22.61	27.13	31.65
50	2.83	4.24	5.65	7.07	8.48	9.89	11.30	12.72	14.13	15.54	16.96	18.37	19.78	21.20	28.26	35.33	42.39	49.46
65	4.78	7.16	9.55	11.94	14.33	16.72	19.10	21.49	23.88	26.27	28.66	31.04	33.43	35.82	47.76	59.70	71.64	83.58
80	7.23	10.85	14.47	18.09	21.70	25.32	28.94	32.56	36.17	39.79	43.41	47.02	50.64	54.26	72.35	90.43	108.52	126.60
100	11.30	16.96	22.61	28.26	33.91	39.56	45.22	50.87	56.52	62.17	67.82	73.48	79.13	84.78	113.04	141.30	169.56	197.82
125	17.66	26.49	35.33	44.16	52.99	61.82	70.65	79.48	88.31	97.14	105.98	114.81	123.64	132.47	176.63	220.78	264.94	309.09
150	25.43	38.15	50.87	63.59	76.30	89.02	101.74	114.45	127.17	139.89	152.60	165.32	178.04	190.76	254.34	317.93	381.51	445.10
200	45.22	67.82	90.43	113.04	135.65	158.26	180.86	203.47	226.08	248.69	271.30	293.90	316.51	339.12	452.16	565.20	678.24	791.28
250	70.65	105.98	141.30	176.63	211.95	247.28	282.60	317.93	353.25	388.58	423.90	459.23	494.55	529.88	706.50	883.13	1059.75	1236.38
300	101.74	152.60	203.47	254.34	305.21	356.08	406.94	457.81	508.68	559.55	610.42	661.28	712.15	763.02	1017.36	1271.70	1526.04	1780.38
350	138.47	207.71	276.95	346.19	415.42	484.66	553.90	623.13	692.37	761.61	830.84	900.08	969.32	1038.56	1384.74	1730.93	2077.11	2423.30
400	180.86	271.30	361.73	452.16	542.59	633.02	723.46	813.89	904.32	994.75	1085.18	1175.62	1266.05	1356.48	1808.64	2260.80	2712.96	3165.12
450	228.91	343.36	457.81	572.27	686.72	801.17	915.62	1030.08	1144.53	1258.98	1373.44	1487.89	1602.34	1716.80	2289.06	2861.33	3433.59	4005.86
500	282.60	423.90	565.20	706.50	847.80	989.10	1130.40	1271.70	1413.00	1554.30	1695.60	1836.90	1978.20	2119.50	2826.00	3532.50	4239.00	4945.50
600	406.94	610.42	813.89	1017.36	1220.83	1424.30	1627.78	1831.25	2034.72	2238.19	2441.66	2645.14	2848.61	3052.08	4069.44	5086.80	6104.16	7121.52


ELEKTROT MATERIAL SELECTION

Electrode material should be selected according to the corrosion resistance of the measuring medium

Electrode Material	Main Properties
316L	Measure the medium such as water, sewage or inorganic acid, organic acid with slight corrosion.
HC	Resist the corrosion of oxidizing acid, such as nitric acid and mixed medium of chromic acid and sulfuric acid, and oxidative hydrochloric acid, such as Fe^{+++} , Cu^{++} and some other oxidants, such as sub-argon salt solution higher than normal temperature and oily water.
Ti	Resist the corrosion of salt water, various oxides, hypochlorite, oxidizing acid (including fuming sulfuric acid, nitric acid), organic acid, alkali and so on. It is not resistant to the corrosion of pure reductive acids such as sulfuric acid and hydrochloric acid, but if oxidizing agents are contained in acid, the corrosion is greatly reduced.
Ta	Have good corrosion resistance similar to glass. Resist the corrosion of almost all chemical medium, except hydrofluoric acid, fuming sulfuric acid and alkali. Sodium hydroxide and other alkaline solutions are not applicable.
Pt-Ir	Have good corrosion resistance of all acid, and can resist the corrosion of alkali and all salt.

Ground Ring Selection

The inductive signal voltage of electromagnetic flowmeter is low, so it is easy to be affected by outside noise or other electromagnetic signals. The function of ground ring is to form a space to shield outside interference so as to increase the accuracy by grounding the body of flowmeter. (The ground ring is required when you use non-metal pipe.) Installation methods in different conditions are as follows.

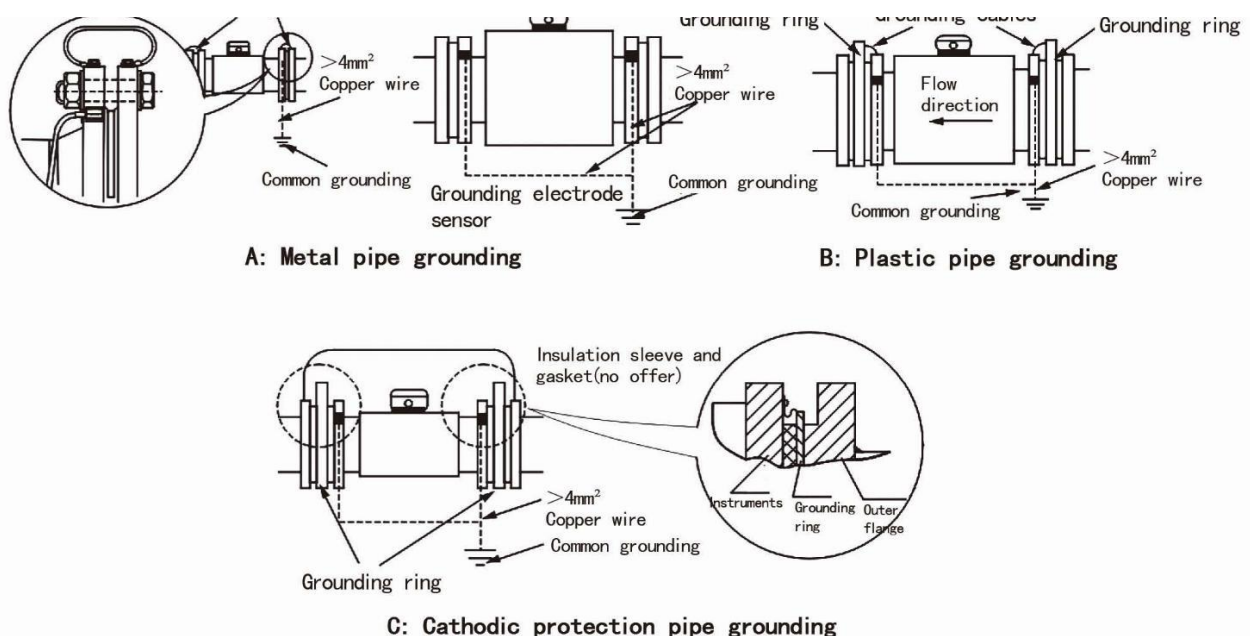

Lining Material Selection

Lining material should be chosen according to the erosion, abrasion and temperature of measuring medium. The applicability of common lining materials are as follows.

Lining Material	Main Properties	Scope of Application
CR	1. Oil proof. Solvent resistance, and resist the Erosion of common medium such as acids, alkali Salt, etc.	1. 0°C-80°C non-strong acid, non-strong alkali and non-strong oxidized medium 2. Be able to measure sewage and mud
IR	1. Good abrasive resistance, corrosion resistance, insulativity, cold resistance 2. Low oil proof, aging resistance, oxidative resistance	1. -10°C-70°C non-strong acid, non-strong alkali and non-strong oxidized medium; suitable for drinking water
PU	1. Very good abrasive resistance and flexibility 2. Low acid and alkali resistance	1. -25°C-60°C 2. Ore pulp, coal slurry and mud with neutral strong abrasive resistance
PFA	1. Good hydrophobicity, non-viscousness and thermostability 2. Great corrosion resistance, can resist strong acid, strong alkali, organic solvent and all saline solution 3. Good negative pressure resistance, which can be increased by adding metal net inside 4. Low abrasion resistance	1. -25°C-140°C non-strong abrasion resistance medium 2. Healthcare medium
PTFE	1. Have the most stable chemical properties in plastics, and can resist boiling hydrochloric acid, sulfuric acid, nitric acid, aqua regia, strong alkali and all kinds of organic solvents, but cannot resist the corrosion of chlorine trifluoride, high temperature nitrogen trifluoride, liquid fluorine, liquid oxygen and ozone 2. Low abrasion resistance 3. Low negative pressure resistance	1. -25°C-140°C 2. Strong corrosion medium such as strong acid and alkali 3. Healthcare medium
FEP(F46)	1. Hydrophobic and non-viscous 2. Corrosion resistance is inferior to PFA 3. Negative pressure resistance can be increased by adding metal net inside. 4. Low abrasion resistance	1. -25°C-100°C non-strong abrasion resistance medium 2. Healthcare medium

How to order

Installation forms	-S	Flange-type sensor	
	-D	Clamping- type sensor	
Pipe diameter	25	25mm	
	32	32mm	
	40	40mm	
	50	50mm	
	65	65mm	
	80	80mm	
	100	100mm	
	125	125mm	
	150	150mm	
	
Electrode form	-F	Standard and fixed type	
Electrode material	A	Stainless steel 316L	
	B	Hb	
	C	Ta	
	D	Ti	
	E	Hc	
Lining Material	R	CR	
	P	PTFE	
	O	Please mark out others	
Measuring pipe material	B	304 Stainless steel	
Flange Material	A	304 Stainless steel	
	C	20#Carbon steel	
Installing matched flange	0	without matched flange	
	1	With matched flange	
Ground Ring	0	without ground ring	
	1	With ground ring	
Rated voltage	-10	1.0MPa	
	-16	1.6MPa	
	-40	4.0MPa	
Working temperature	E	$\leq 60^{\circ}\text{C}$	
	H	$\leq 180^{\circ}\text{C}$	
Form of converter	-I	Integrated type	
	-D	Divided type	
Output signal and communication	P	Pulse	
	A	4-20mA	
	J	485 communication	
	H	HART communication protocol	
	Q	Other signal or communication method	
Power supply	0	220V AC	
	1	24V DC	
Protection level	...0	IP65	
	1	IP68	
Explosive-proof level	0	non-explosion proof	
	EX	EX	