


客户名称(Customer):
 档案名称(FileName): 6KW
 电机型号(Type): KL-6000M/BLDC
 电机编号(Number): 201301240004

额定电压(Voltage): 72
 额定功率(Power rated): 6KW
 测试人员(Tester):
 测试日期(Test Date): 2013.01.24

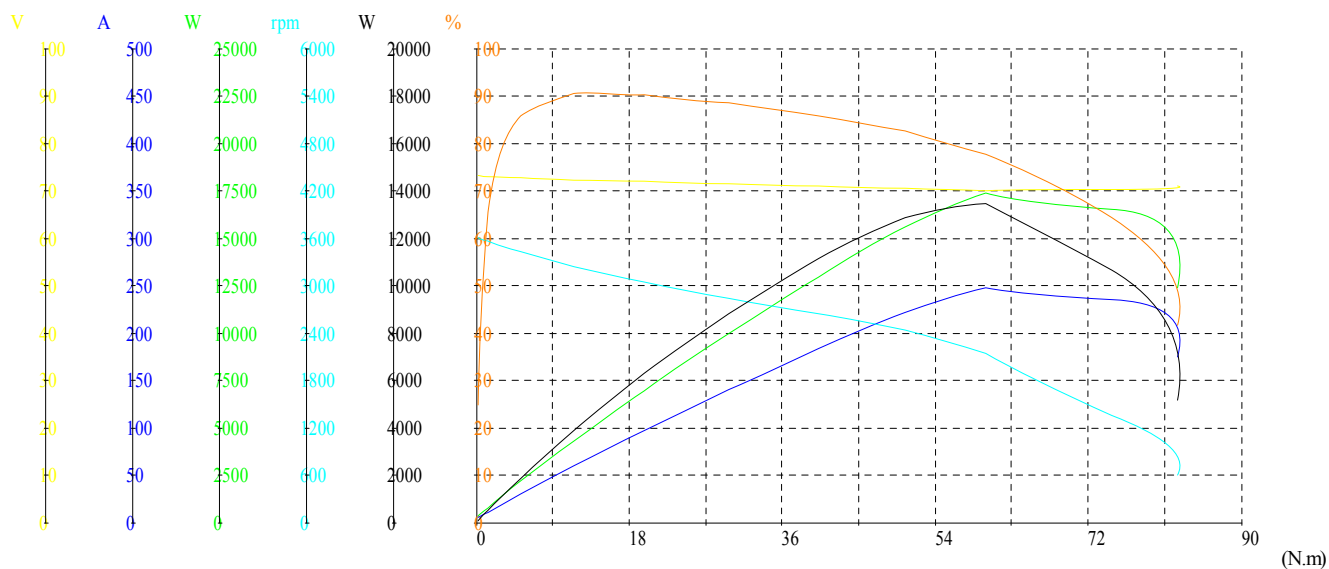

特征点	电压	电流	输入功率	转矩	转速	输出功率	效率	时间
	V	A	W	N.m	rpm	W	%	S
不加载点(No_Load)	73.15	4.984	364.6	0.24	3606	90.61	24.9	0.000
最高效率点(Eff_max)	72.18	70.87	5116	13.99	3175	4651	90.9	41.00
最大输出功率点(Pout_max)	70.07	247.7	17350	60.03	2144	13475	77.7	97.00
最大转矩点(Torque_max)	70.45	216.4	15240	83.80	872	7651	50.2	117.0
结束点(End)	71.00	174.4	12380	82.58	594	5136	41.5	121.0

客户名称(Customer): 额定电压(Voltage): 72V
 档案名称(FileName): 额定功率(Power rated): 6KW
 电机型号(Type): KL-6000M/BLDC 测试人员(Tester):
 电机编号(Number): 201301240004 测试日期(Test Date): 2013.01.24

序号	电压	电流	输入功率	转矩	转速	输出功率	效率	时间
	V	A	W	N.m	rpm	W	%	S
1	73.15	4.984	364.6	0.24	3606	90.61	24.9	0.000
2	73.09	5.206	380.5	0.36	3599	135.7	35.7	5.000
3	73.00	7.442	543.3	0.72	3584	270.2	49.7	9.000
4	72.93	10.81	788.7	1.39	3557	517.7	65.6	13.00
5	72.85	15.45	1126	2.37	3524	874.4	77.7	17.00
6	72.77	22.15	1611	3.66	3474	1331	82.6	21.00
7	72.68	30.11	2189	5.23	3424	1875	85.7	25.00
8	72.56	38.89	2822	7.06	3364	2487	88.1	29.00
9	72.45	48.89	3542	9.11	3305	3152	89.0	33.00
10	72.33	59.43	4299	11.44	3244	3886	90.4	37.00
11	72.18	70.87	5116	13.99	3175	4651	90.9	41.00
12	72.04	84.14	6061	16.79	3108	5464	90.1	45.00
13	71.90	96.94	6970	19.77	3039	6290	90.3	49.00
14	71.71	111.1	7970	22.94	2970	7133	89.5	53.00
15	71.54	125.6	8992	26.28	2903	7988	88.8	57.00
16	71.38	139.8	9984	29.73	2835	8825	88.4	61.00
17	71.20	154.2	10980	33.25	2763	9619	87.6	65.00
18	71.03	169.1	12010	36.76	2705	10412	86.7	69.00
19	70.87	182.9	12960	40.24	2643	11135	85.9	73.00
20	70.69	196.6	13900	43.68	2581	11804	84.9	77.00
21	70.55	210.1	14820	47.05	2516	12394	83.6	81.00
22	70.41	221.7	15610	50.45	2437	12873	82.5	85.00
23	70.29	231.7	16290	53.67	2343	13167	80.8	89.00
24	70.16	241.2	16930	56.91	2250	13407	79.2	93.00
25	70.07	247.7	17350	60.03	2144	13475	77.7	97.00
26	70.13	242.9	17030	62.72	1965	12904	75.8	101.0
27	70.19	237.7	16680	68.83	1640	11819	70.9	105.0
28	70.23	235.1	16510	74.81	1357	10629	64.4	109.0
29	70.25	233.2	16380	80.38	1124	9459	57.7	113.0
30	70.45	216.4	15240	83.80	872	7651	50.2	117.0
31	71.00	174.4	12380	82.58	594	5136	41.5	121.0