
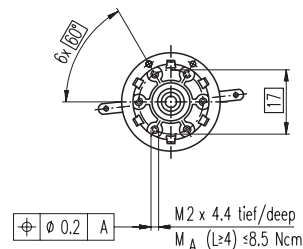
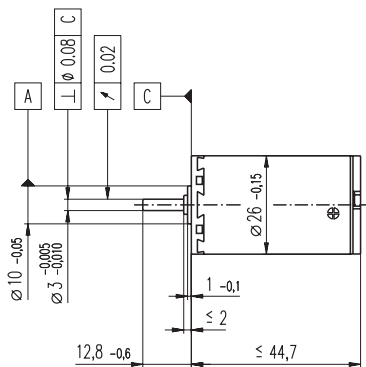


A-max 26 Ø26 mm, Graphite Brushes, 6 Watt

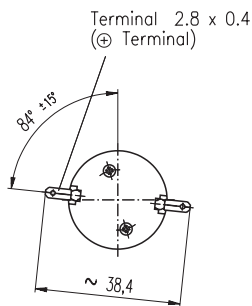

M 1:2

- Stock program
- Standard program
- Special program (on request)

Order Number

110923 110924 110925 110926 110927 110928 110929 110930 110931 110932 110933 110934


Motor Data

		110923	110924	110925	110926	110927	110928	110929	110930	110931	110932	110933	110934	
Values at nominal voltage														
1	Nominal voltage	V	7.2	9.0	12.0	12.0	18.0	18.0	24.0	24.0	30.0	36.0	42.0	48.0
2	No load speed	rpm	9270	10000	10000	8300	8260	7410	8590	7870	8810	8440	8170	6240
3	No load current	mA	118	104	76.8	59.7	39.2	34.0	30.8	27.6	25.4	20.0	16.4	10.3
4	Nominal speed	rpm	7160	7620	7600	5590	5640	4790	5880	5100	6210	5850	5550	3550
5	Nominal torque (max. continuous torque)	mNm	6.73	7.97	11.1	13.0	13.6	13.8	13.1	12.9	13.7	13.8	13.7	13.7
6	Nominal current (max. continuous current)	A	1.08	1.08	1.08	1.03	0.708	0.642	0.532	0.481	0.452	0.365	0.300	0.201
7	Stall torque	mNm	38.2	39.7	52.7	43.8	45.6	41.0	43.5	38.1	47.9	46.4	43.7	32.6
8	Starting current	A	5.50	4.90	4.80	3.29	2.25	1.82	1.67	1.34	1.51	1.16	0.911	0.455
9	Max. efficiency	%	67	69	73	72	74	73	74	73	75	75	75	72
Characteristics														
10	Terminal resistance	Ω	1.31	1.84	2.50	3.65	8.00	9.91	14.4	17.9	19.9	31.0	46.1	106
11	Terminal inductance	mH	0.101	0.138	0.254	0.372	0.862	1.07	1.42	1.69	2.13	3.35	4.85	10.8
12	Torque constant	mNm / A	6.94	8.09	11.0	13.3	20.2	22.5	26.0	28.3	31.8	39.9	48.0	71.6
13	Speed constant	rpm / V	1380	1180	869	718	472	423	367	337	300	239	199	133
14	Speed / torque gradient	rpm / mNm	260	268	198	197	186	186	203	213	188	186	191	197
15	Mechanical time constant	ms	33.4	30.5	27.9	27.1	25.4	25.2	24.9	24.9	24.5	24.2	24.2	24.2
16	Rotor inertia	gcm ²	12.3	10.9	13.5	13.1	13.0	12.9	11.7	11.2	12.5	12.5	12.1	11.7

Specifications

- Thermal data**
- 17 Thermal resistance housing-ambient 13.2 K / W
 - 18 Thermal resistance winding-housing 3.2 K / W
 - 19 Thermal time constant winding 12.4 s
 - 20 Thermal time constant motor 647 s
 - 21 Ambient temperature -30 ... +85°C
 - 22 Max. permissible winding temperature +125°C
- Mechanical data (ball bearings)**
- 23 Max. permissible speed 10400 rpm
 - 24 Axial play 0.1 - 0.2 mm
 - 25 Radial play 0.025 mm
 - 26 Max. axial load (dynamic) 5 N
 - 27 Max. force for press fits (static) 75 N
 - 28 Max. radial loading, 5 mm from flange 20.5 N
- Mechanical data (sleeve bearings)**
- 23 Max. permissible speed 10400 rpm
 - 24 Axial play 0.1 - 0.2 mm
 - 25 Radial play 0.012 mm
 - 26 Max. axial load (dynamic) 1.7 N
 - 27 Max. force for press fits (static) 80 N
 - 28 Max. radial loading, 5 mm from flange 5.5 N
- Other specifications**
- 29 Number of pole pairs 1
 - 30 Number of commutator segments 13
 - 31 Weight of motor 98 g
- Values listed in the table are nominal.
Explanation of the figures on page 47.
- Option**
Sleeve bearings in place of ball bearings
Pigtails in place of terminals

Operating Range

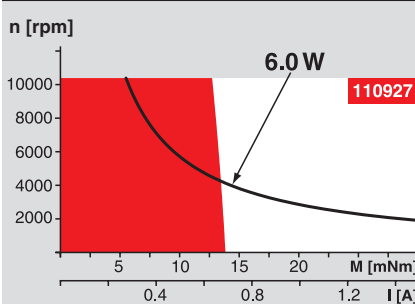


Comments

- Continuous operation**
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
- Short term operation**
The motor may be briefly overloaded (recurring).
- Assigned power rating**

maxon Modular System

Overview on page 16 - 21

- Planetary Gearhead**
Ø26 mm
0.5 - 2.0 Nm
Page 226
- Spur Gearhead**
Ø30 mm
0.07 - 0.2 Nm
Page 227
- Planetary Gearhead**
Ø32 mm
0.4 - 6.0 Nm
Page 228 / 229 / 232
- Spur Gearhead**
Ø38 mm
0.1 - 0.6 Nm
Page 234

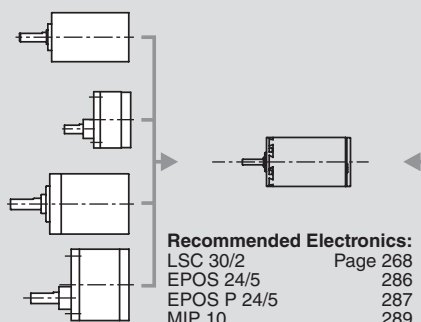

Encoder MEnc
Ø13 mm
16 CPT, 2 channels
Page 262

Recommended Electronics:
LSC 30/2 Page 268
EPOS 24/5 286
EPOS P 24/5 287
MIP 10 289
Notes 18