


SIGRACET®

GDL 24 & 25 Series Gas Diffusion Layer

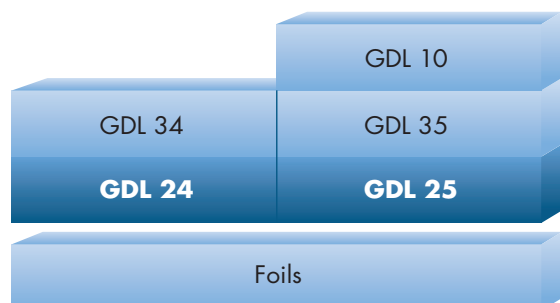

After the introduction of our 200-micron thick GDL series GDL 20/21 in 2002, SGL Group has been further improving the series with respect to production yield and product variability. We have introduced our newest grades, GDL 24 and GDL 25, to the commercial market. SGL Group has invested heavily in this product development and has been contributing resources from a number of different and cross-functional parts of the organization. The result has been the launch of our new grades GDL 24/25.

Users have confirmed the excellent match of the properties:

- Greatly improved homogeneity inter-lot and intra-lot. The overall variability has been shown to be better than +/- 10% (2 sigma)

- Greatly improved surface flatness
- Greatly reduced occurrence of faulty spots on a roll
- Greater roll length
- Best performance under various operating conditions

The above list is not sacrificing any of the list of properties which makes SGL Group's GDL unique:

- Produced and shipped as a continuous roll good
- Utilizing low-cost nonwoven processes
- Hydrophobic treatment of the substrate to the desired level by coating the bulk surfaces with PTFE
- Coating of material grades with SGL Group's unique microporous layer for better membrane contact, water management and mechanical protection
- Concept of lower and higher porosity (GDL 24: lower, GDL 25: higher porosity) to react with cell humidity level.

The introduced product series GDL 24/25 is intended to combine the required production robustness and the excellent performance properties. Stack developers and assemblers are benefiting from the greatly improved characteristics.

Properties of SIGRACET® GDL 24/25

Property	Unit	GDL 24 BA	GDL 24 BC	GDL 25 BA	GDL 25 BC
Thickness ▲	mil	7.5	9.3	7.5	9.3
	µm	190	235	190	235
Areal Weight	oz/ft ²	0.18	0.33	0.13	0.28
	g/m ²	54	100	40	86
Porosity	%	84	76	88	80
Air Permeability ■	cm ³ /(cm ² · s)	60	0.6	210	1.0
Electrical Resistance (through plane) ●	mΩcm ²	< 10	< 12	< 10	< 12

▲ Under 0.25 N/cm², sample diameter 13 mm




■ Gurley model 4118, 300 cc, 0.1 sq in orifice

● 2-point measurement, circular (25 mm diam.) gold-plated contacts under pressure of 10 bar

Broad Base. Best Solutions.


Grades

We supply SIGRACET Gas Diffusion Layers in roll form in lengths of 75 +/- 25 m. Our standard roll width is 45 cm, but we can split parent rolls into multiples thereof, i. e. 2 x 22.5 cm wide rolls, 3 x 15 cm wide rolls, etc. Sheets stamped to a specified geometry are also available if so desired. Substrate PTFE loadings are available from 0 to 30 wt%, but 5 wt% is standard.

	AA	YA	YC			
						
	Y	A	B	C	D	E
% PTFE		0	5	10	20	30



- GDL "AA"** is our plain substrate with no value-added post-processing.
- GDL "BA"** is our hydrophobized substrate with a 5 wt% PTFE loading.
- GDL "BC"** is our hydrophobized substrate (5 wt% PTFE) with our standard Microporous Layer (MPL) on one side.

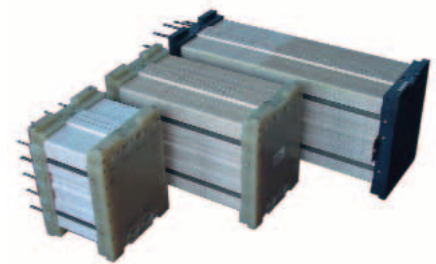

By courtesy of Nuvera



By courtesy of Hydrogenics

Unique Characteristics

Our GDL 24/25 nonwovens are of a 2-dimensional structure designed to have lower thickness, higher bending stiffness, lower compression set, and lower compressibility than GDL 10.

GDL 24/25 is a further development towards thinner materials maintaining the properties of the GDL 20/21 series. GDL 24/25 has also greatly improved tolerances (thickness and areal weight) and a lower anisotropy factor between the machine and transverse directions.

On request, we will advise you on maximum compression loads for use in bonding to Catalyst-Coated Membranes (CCMs) or assembling stacks. Gasket design also needs to take the compression behavior into account.

® registered trademark of SGL Group companies

04 2007/1 2NÄ Printed in Germany

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should therefore not be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our "General Conditions of Sale".