


## Data Sheet

Item	Contents		Criteria <b>(Adjustable)</b>
1	Model	HCX-D170 (40MOS)	32S-30A working current
2	Voltage	Charging voltage	115.2V
3	Current	Maximal continuous charging current	30A
		Maximal continuous discharging current	30A
		Current consumption	≤20μA
4	Overcharge Protection	Over charge detection voltage	3.90V±0.025V
		Over charge detection delay time	0.5~2S
		Over charge release voltage	3.80V±0.05V
5	Over Discharge Protection	Over discharge detection voltage	2.00V±0.05V
		Over discharge detection delay time	50~200mS
		Over discharge release voltage	2.30V±0.1V
6	Over Current Protection	Over current detection voltage	0.1V~0.2V
		Over current detection current	90±10A
		Detection delay time	5~20mS
		Release condition	Cut load,automatically recover
7	Short Circuit Protection	Detection condition	Exterior shot circuit
		Detection delay time	200~500uS
		Release condition	Cut load,automatically recover
8	Balance	Balance voltage for single cell	3.60V±0.025V
		Balance current for single cell	218mA±20mA
9	Resistance	Inner resistance	≤20mΩ
10	Temperature	Operating temperature range	-40~+85°C
		Storage temperature range	-20~+125°C
11	Size (L*W*T)	L220mm*W120mm*T30mm	

## Remarks:

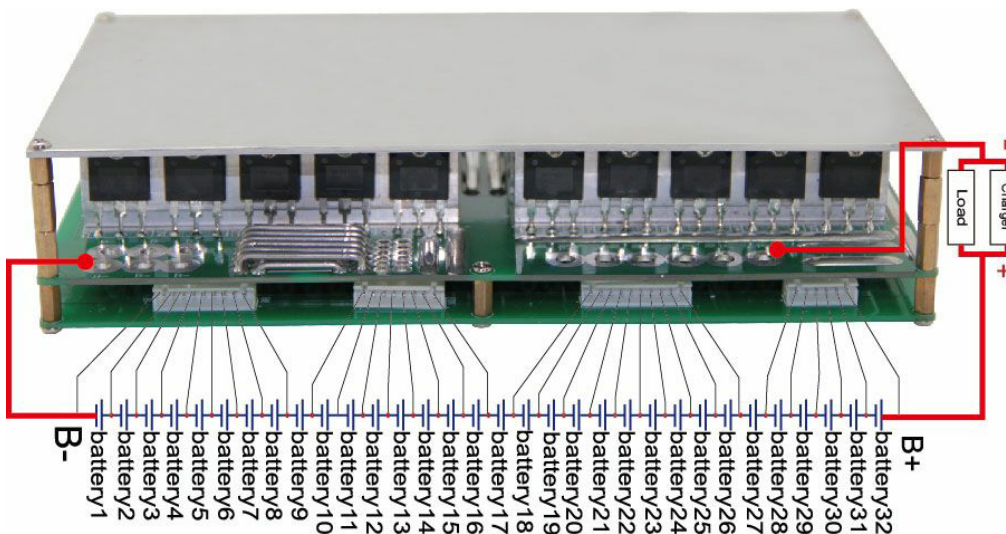

Charge, Discharge at same Port  
 P+ = B+ / Charge+ / Discharge+  
 P- = Charge- / Discharge-

\*Note: Characteristics subject to change without notice.